

AL5HU series / LOCK

Handle & Color Variation



Full-metal type outside escutcheon is available as an option.

The pressed stainless steel escutcheon is available as standard in 5 high-quality finishes.

Type 19 Handle

Type 66 Handle

Type 67 Handle

Type 74 Handle

Type 476 Handle



Satin Stainless Steel Finish (ST)
Key Override available as an option.

Polished Stainless Steel Finish (SB)

Satin Brass Finish (BS)

Polished Brass Finish (YB)

Mid Bronze Finish (CB)

The AL5H hotel lock from Miwa has passed the ANSI 156.25 test confirming its status as a "Grade 1" electronic mortise lock.

MIWA LOCK CO., LTD.



JAPAN 3-1-12, Shiba, Minato-ku, Tokyo, JAPAN
TEL : +81-3-3452-5568 FAX : +81-3-3452-5911 URL : <http://www.miwa-lock.co.jp>

U.S.A 39W835 Midan Drive, Unit E Elburn, Illinois 60119, USA
TEL : +1-630-845-1240 / Free Dial : +1-888-412-9750 FAX : +1-630-845-1244 URL : <http://www.miwalock.com> E-mail : sales@miwalock.com

U.K Cambridge House, Waterside Court, Neptune Close, Medway City Est, Rochester Kent ME2 4NZ U.K.
TEL : +44-163-429-6869 FAX : +44-163-429-6992 URL : <http://www.miwa.co.uk> E-mail : sales@miwa.co.uk

Handle & Color Variation

Detail Drawing

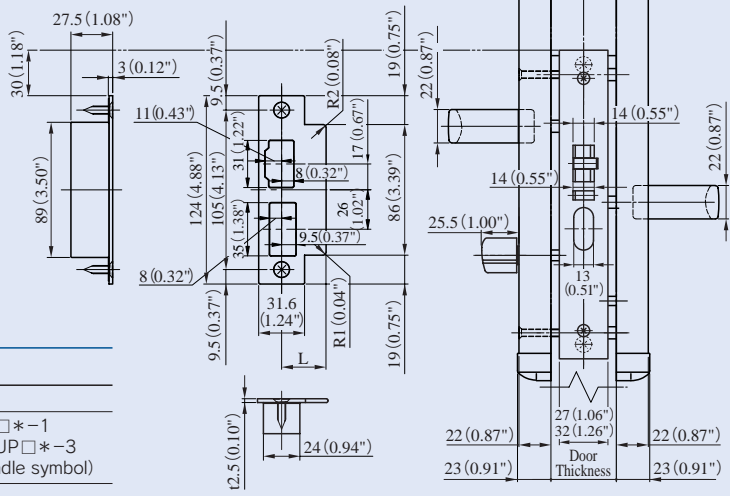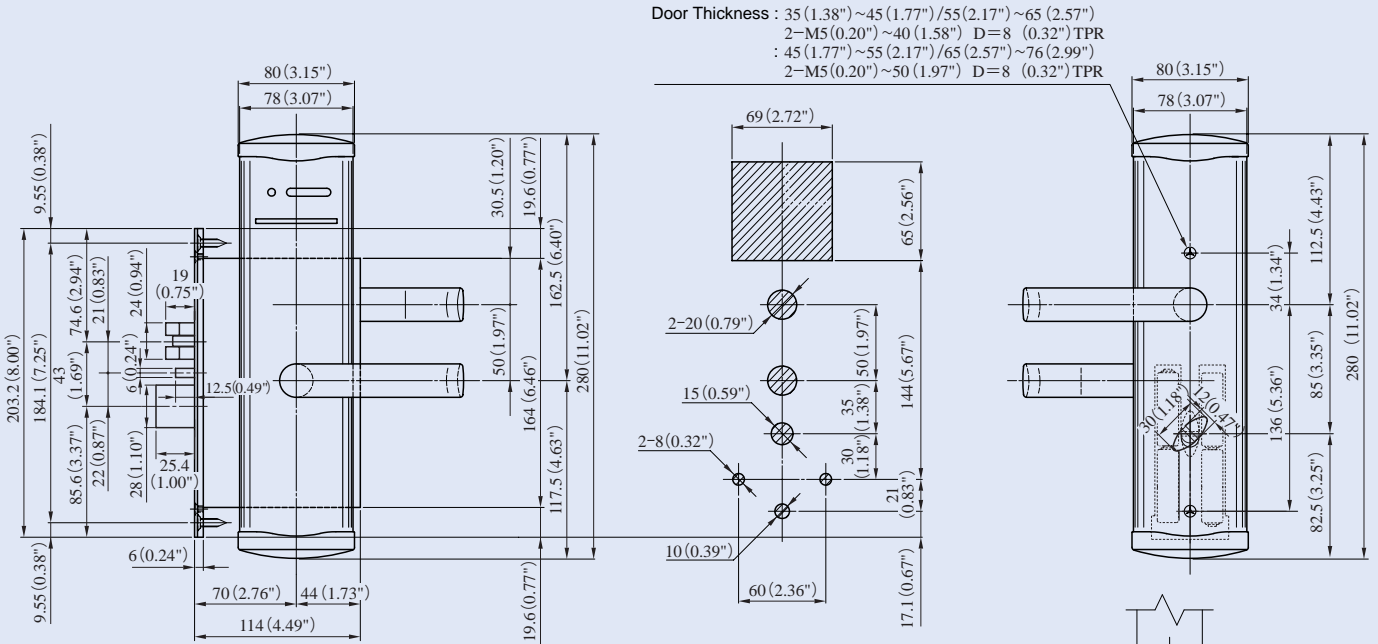


Specifications

AL5HU series

Product Name	Hotel Card Lock
Product Number	with cylinder : AL5HUA□* -1 / AL5HUP□* -1 without cylinder : AL5HUA□* -3 / AL5HUP□* -3 (□=D : 27mm , G : 32mm / * shows a handle symbol)
Mountable Handles	19, 66, 67, 74, 476
Mountable Cylinders	U9
Backset	70mm
Material/Finish	Satin Stainless Steel (ST) Polished Stainless Steel (SB) Satin Brass (BS) Polished Brass (YB) Mid Bronze (CB)
Door thickness	35~75mm
Usability	Left-hand and right-hand usable (inward opening)
Power Supply	4 AA alkaline batteries

Option [Lock Unit For External Installation]

This special lock has been designed for installations in outdoor or harsh environments, such as coastal areas. The outside stainless steel escutcheon is coated with an anti-corrosion clear lacquer and the reader controller has a coating of resin, providing protection to the essential electronics. As with the standard lock, the battery box is located in the inside escutcheon, ensuring a stable operation even when the lock is installed on a door exposed to extreme climate conditions.

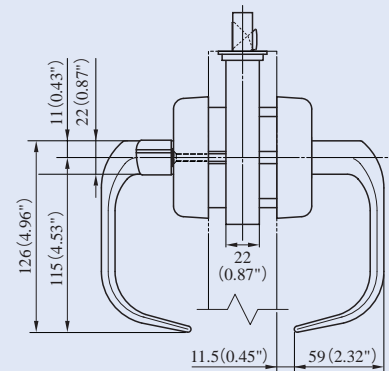

Door Thickness	L
35 (1.38")~55 (2.17")	30.5 (1.20")
55 (2.17")~76 (2.99")	40.5 (1.59")