


310-2
310-4

300 Series

- Corrosion resistant - brass faceplate, cast stainless steel case and working parts, stainless steel springs.
- Tamper resistant - heavy-duty.
- Non-fail safe - unlocks when energized.
- Solenoid actuated - (24VAC standard) - may be energized continuously when unlocked. (AC-voltage units are adjustable, to operate either quietly, on

continuous duty or audibly, on intermittent duty.)

- Reversible - non-handed.
- Horizontal adjustment.
- U.L. Listed - Standard No. 1034, burglary resistant electric locking mechanisms. 310-2, 310-2-3/4 NFS are also U.L. listed as fire door accessories with a 3-hour (A label) rating - U.L. 10B.
- BHMA Standard 156.5, Grade 1 electric strike.

Mfg. #	Voltage	Func.	Fin.	EZ#
For use with Bored Locks, Mortise Locks and Mortise Exit Devices with 1/2" or 5/8" Latch Throw				

FR310 2 32D24VAC	24VAC	NFS	32D	003914
-------------------------	-------	-----	-----	---------------

FR310 2 32D24VDC	24VDC	NFS	32D	026340
-------------------------	-------	-----	-----	---------------

FR310 2FS32D12VDC LCBM	12VDC	FS	32D	077704
With Latch Cam Bolt Monitor				

Mfg. #	Voltage	Func.	Fin.	EZ#
For use with Rim Exit Devices and Surface Vertical Rod Devices having Pullman Latchbolts				


FR310 4 32D24VAC	24VAC	NFS	32D	026347
-------------------------	-------	-----	-----	---------------

FR310 4 32D24VDC	24VDC	NFS	32D	026343
-------------------------	-------	-----	-----	---------------

500 Series

- Corrosion resistant - stainless steel internal parts and zinc die cast body.
- Tamper resistant, heavy-duty.
- Non-fail safe - unlocks when energized.
- Reversible - non-handed.
- Horizontal adjustment.
- ANSI A115.1 standard prep.
- Faceplate finish: US32D

For use with Bored Locks, Mortise Locks (without deadbolts) and Mortise Exit Devices

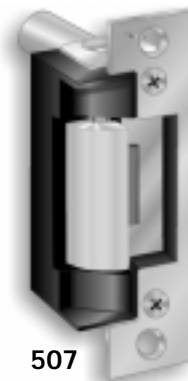
507

Mfg. #	Voltage	Function	Application	EZ#
FR507 32D24VDC	24VDC	32D	Wood Frame	067655

652 Mortise Latchbolt Kit

- US32D Mortise Latchbolt Kit
- Accommodates mortise latch bolts up to 3/4"
- Fits ANSI A115.1 prep with simple modification to the face of the frame.
- Fits narrow 1 3/4" jamb. Hollow metal or aluminum tube.
- Non-handed.
- NFS model releases door with a minimum side load pressure of 20 lbs.
- Easy horizontal adjustments to compensate for door position.



Mfg. #	Voltage	Func.	Fin.	EZ#
FR6652LKT NFS 12VDC	12VDC	NFS	32D	073160

Replacement Parts

310 Series


Solenoid Assembly

Non-fail-safe (fail secure)

FR076 0123 002 24VAC	EZ# 026348
-----------------------------	-------------------

FR076 0122 002 12VDC	EZ# 028344
-----------------------------	-------------------

FR076 0122 003 24VDC	EZ# 026349
-----------------------------	-------------------



FS -	<i>Fail-Safe - locks when energized.</i>
NFS -	<i>Non fail safe - unlocks when energized.</i>
32D -	<i>Satin stainless steel.</i>

Rectifier (All models)

Converts AC to DC current.

FR076 0712 002 Rectifier	EZ# 067656
---------------------------------	-------------------